



The work of the European Pallet Association, its National Committees and licensees forms the stable basis for the successful, open pallet pool and enables the global exchange of EPAL load carriers. There are more than 450 million EPAL pallets in circulation around the globe that are used throughout the sector and it would be impossible to imagine industry and logistics without them. The design of the EPAL 3 industrial pallet makes it ideal for the heaviest of industrial loads. Constant quality assurance and high quality materials ensure trouble-free, safe performance for users and loading. Their multiple use saves a considerable amount of environmental and economic resources.

FACTS & FIGURES

Materials: 13 boards of quality timber, 9 woodchip or solid wood blocks, 84 nails. Produced according to the EPAL Technical Regulations.

Length	1,000 mm
Width	1,200 mm
Height	144 mm
Weight	ca. 30 kg
Safe working load	1,500 kg

When stacking laden pallets on a solid, even surface, the bottommost pallet must not exceed a load of max. 4,500 kg.




"EPAL in oval" on the left and



IPPC symbol, country code, registration number of the national plant protection authority, heat treatment, licence number-year-month on the central block





4-sided accessibility with chamfered lower edge

boards on both sides enables highly efficient

handling during production, storage and transportation all the way along the supply chain.

Compatible with all (conventional) standard load

QUALITY CONTROL

The international pool of EPAL load carriers is the only load carrier pool in the world subject to independent quality assurance by external inspection companies. This is the only way for EPAL load carriers to guarantee the consistently high guality that they offer the markets.



ISPM 15

Compliance with the ISPM 15 stan-Ρ dard is the most essential condition Ρ for the unrestricted use of load car-C riers in the international movement of goods. All EPAL load carriers are

therefore produced according to the stringent specifications of the IPPC and can thus be deployed around the globe. Local plant protection agencies will provide information on the countries that recognise the IPPC standard.

REPAIR

HANDLING



Damaged EPAL pallets can be repaired cost effectively and in a climate-friendly manner by all EPAL-licensed pallet repair opera-

tions. Following the quality-assured repair, EPAL pallets repaired according to standard receive a repair nail bearing the "EPAL" trademark and the licence number of the repair operation.


MARKINGS

right corner block (since 08/2013)






1,000 mm side

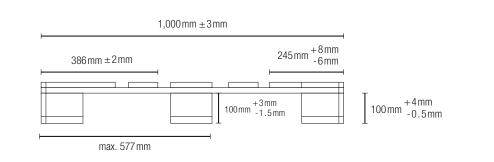

1,200 mm side

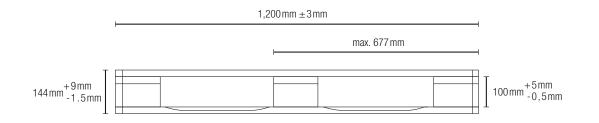

Top view

